


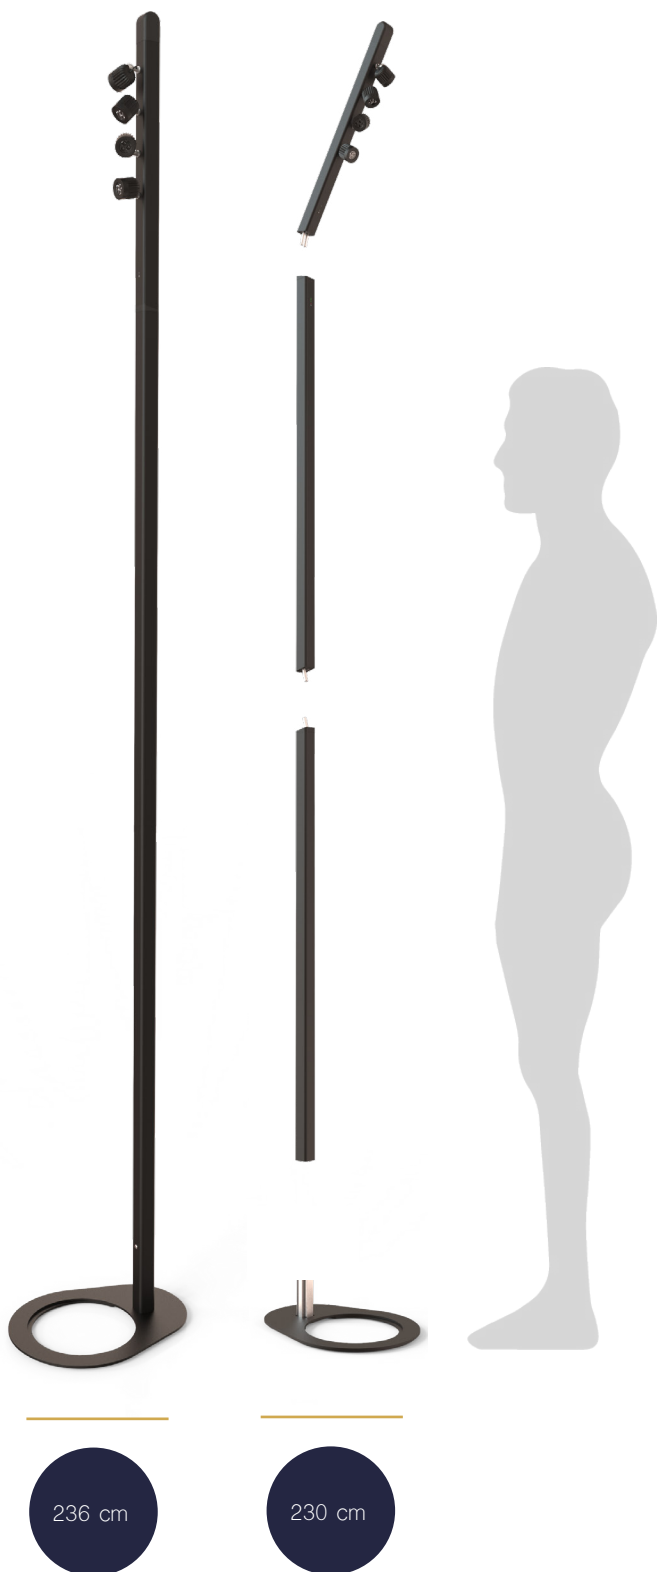

236 cm

230 cm

COMPOSITION

- 180° reversible head with 4 spotlights
- Vertical or inclined,
- Li-Ion battery module
- Extension modules : 20cm, 50cm and 85cm
- Base (open design) (contact us for full base)

MATERIALS

- Extruded aluminium profile 6106T5
- AS13 Injected aluminium spotlight
- Hermalink® and Hermatwist® : injected polypropylene and stainless steel pins
- RF cap : injected 6-6 polyamide
- Steel base

FINISH

- Powder-coated epoxy paint
- Black RAL2100ST (textured) and White RAL9003
- Contact us for colour customization

LED POWER & TECHNOLOGY

- 18W (4 x 4,5 W)
- LED Cree XPG2 HE

LIGHT INTENSITY

- Up to 2000 lumens

BATTERY AND AUTONOMY

- 6 to 110h depending on the setting
- Li-Ion battery 14,8V / 150Wh

TEMPERATURE RANGE

- 0°C à +40°C

NORMS

- **On battery :** Class I, IP43, IK08, CE, EN 60598
- **On mains :** Class II, IP20, IK08, CE, EN 60598

WEIGHT

- 9 Kg

WARRANTY

- 5 years (Li-Ion battery 6 months in normal use)

COLOUR TEMPERATURE

- CCT White tuning (3000K to 5000K)
- 3000K
- 4000K


OPTICAL LENSES

- 26°
- 35°
- Asymmetrical 39°x24°


HEIGHT

- Vertical : 2,36m
- Inclined : 2,30m


DIMMER/AUTONOMY

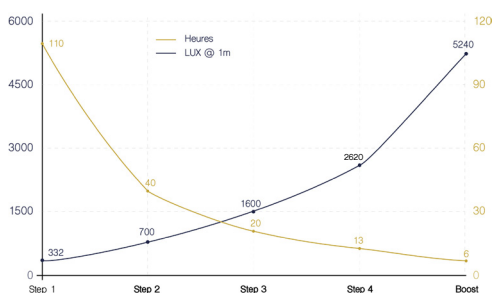

CHOICE OF OPTICAL LENSES

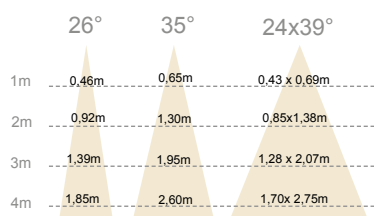

OPTIONS





1. EXTRA CCT TUNING MODULE

- 3 LED per spot : 3000K, 4000K and 5000K
- 18W (4 x 4,5 W)
- Programmable once switched on
- Remote-controlled

2. EXTRA WARM WHITE MODULE

- 3 x 3000K LED per spot
- 18W (4 x 4,5 W)
- Remote-controlled




3. EXTRA NEUTRAL WHITE MODULE

- 3 x 4000K LED per spot
- 18W (4 x 4,5 W)
- Remote-controlled

4. EXTRA BATTERY MODULE

- 14.8V Li-Ion Battery
- 150Wh



5. ON MAINS (WITHOUT BATTERY)

- 100-240V AC / 50-60Hz external power supply
- 15V DC / 1,2A
- Interchangeable AC plugs
- Designed for fixed installations

6. PACKAGING

Case

Designed for 2 T4X



Height : 16 cm
Width : 45 cm
Length : 117 cm
Weight : 8kg

Stack

Designed for 4 cases



Height : 13,5 cm
Width : 44 cm
Length : 118 cm
Weight : 10kg

