

# SUPERNOVA LT

*Outdoor Moving Profile — Ultimate Long-Throw Power*

**SPEC SHEET**



Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 09/07/2026



# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power

SPEC SHEET

## FIXTURE OVERVIEW

- As a revolutionary evolution of the SUPERNOVA, the all-new ACME **SUPERNOVA LT** is the first long-throw luminaire in ACME range. It delivers unmatched brightness, ultra-intense beams, and a larger lens, setting a new standard in high performance lighting.
- Equipped with an industry-leading 1,800W LED engine, the **SUPERNOVA LT** delivers a jaw-dropping 70,000 lumens of output with even beam distribution. The fixture develops an ultra-large 245 mm frontal lens, bringing high impact visuals to any production. Its advanced optical system is designed to meet any creative needs. With three switchable zoom modes, it offers designers complete flexibility from wide coverage to extreme long-throw precision. In standard optical zoom mode, the fixture is capable of 3.6° to 52.5° coverage. While using the beam reducer, it can narrow the coverage for 1.9° to 25°. In the long-throw mode (using iris), it delivers an ultra-tight 0.9° to 5° beam with crisp, precise beams.
- The **SUPERNOVA LT** elevates every scene with a variable CTO, allowing color temperature adjustment from 2,700K to 6,700K, seamlessly shifting from warm tones to crisp daylight balance. A high CRI mode ( $Ra \geq 95$ ) ensures natural, accurate color reproduction, bringing out every detail with stunning clarity. To unlock limitless color possibilities, the fixture combines a CMY color mixing system for smooth transitions, with dual color wheels for rich, vibrant hues.
- Take creativity to the next level. The **SUPERNOVA LT** is packed with effects to inspire designers. It features dual rotating gobo wheels and an animation wheel capable of both horizontal and vertical movement. These rotating gobos can be paired with two rotating prisms—a 4-facet circular prism and a 4-facet linear prism—to create dynamic, multi-layered lighting effects. Two combinable frost filters (one degree diffusion and five degree diffusion) soften beam edges for smooth, even washes, creating magical effects across the stage. Featuring a  $\pm 60^\circ$  rotating framing module with four independent shutter blades, the fixture enables precise beam shaping, fast positioning, and instant full blackout, adding visual depth and dramatic impact to any stage.
- Engineered for reliable long-term outdoor performance, the IP66-rated **SUPERNOVA LT** features a sunlight protection mode accessible via the menu. When this mode is enabled, the fixture automatically adjusts its head direction upon power-off, shielding the optics from direct sunlight—even without signal control.
- The **SUPERNOVA LT** supports an optional camera enclosure, designed for integration with third-party remote follow spot systems. With the optional follow spot kit—including a follow spot handle and control pad—users can manually control the light, dimming levels, and color temperature, recreating the experience of a traditional follow spot.
- Redefining performance, optical excellence, and output—the **SUPERNOVA LT** stands as the ultimate large-format lighting solution. Engineered for professionals who demand the best, it dominates any high-impact lighting application.



# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power

**SPEC SHEET**

## FEATURE HIGHLIGHTS

- LED engine comprised of 1,800W LED engine
- 245 mm diameter frontal lens
- Zoom Range:  
Standard Optical Zoom: 3.6°-52.5°  
Using Beam Reducer: 1.9°- 25°  
Long-Throw Mode(Using Iris): 0.9° - 5°
- Fixture Luminous Output:  
Auto Mode: 70,000 lumens  
Quiet Mode: 51,000 lumens  
Super Quiet Mode: 37,100 lumens
- Color Temperature Output of Fixture: 6,700K (native)
- Standard Mode: Ra≥70, HCRI Mode: Ra≥95
- Linear CMY color mixing
- Variable CTO ranging from 2,700K-6,700K
- 2 Rotating Gobo Wheels:  
Rotating Gobo Wheel 1: 5 gobos + 1 beam reducer, plus open  
Rotating Gobo Wheel 2: 6 gobos, plus open
- 2 Color Wheels:  
Color Wheel 1: 5 colors, plus open  
Color Wheel 2: 3 colors + CRI, plus open
- 1 graphic animation wheel with continuous rotation in both directions, offering excellent vertical and horizontal movement
- 2 combinable rotating and indexable prisms
- 1° diffusion and 5° diffusion
- 4 rotating full blackout framing shutter blades with individually controllable; ±60° rotation of the framing system module
- Outstanding strobe effect with variable speed
- Smooth dimming 0-100% (4 user selectable dimming curves)
- IP66 rated

## TECHNICAL SPECIFICATIONS

### Model

- Model Name: SUPERNOVA LT
- Model Code: XA 2000 BSWF IP LT

### Light Source

- Light Source: 1,800W LED engine
- Color Temperature Output of Fixture: 6,700K (native)
- Life Expectancy: 20,000 hours\*
- \*Source manufacturer specification

### Photometric Data

- Fixture Luminous Output:  
Auto Mode: 70,000 lumens  
Quiet Mode: 51,000 lumens  
Super Quiet Mode: 37,100 lumens
- CCT: 6,700K (+/- 200K)
- Standard Mode: Ra≥70, HCRI Mode: Ra≥95
- TM-30 Rf (IES TM-30-15 Fidelity Index): 73

- TM-30 Rg (IES TM-30-15 Fidelity Index): 93
- TLCI: 47
- CQS: 74
- Peak Luminous Intensity: 7,720,000 cd

### Optical System

- Zoom Range:  
Standard Optical Zoom: 3.6°-52.5°  
Using Beam Reducer: 1.9°- 25°  
Long-Throw Mode(Using Iris): 0.9° - 5°
- Diameter of Frontal Lens: 245 mm

### Control & Program

- 4 touch button control panel
- Display: LCD display
- Protocols: DMX512, RDM, Art-Net, sACN,NFC
- DMX Protocol Modes: 4

# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power

**SPEC SHEET**

## TECHNICAL SPECIFICATIONS

- Control Channels: 23/32/34/43
- Firmware Upgrade: Upgrade via DMX link or USB stick

### Pan & Tilt

- Pan: 540°
- Tilt: 246°
- Automatic Pan/Tilt position correction
- Resolution: 16 bit
- Pan/Tilt lock

### Color Mixing

- Linear CMY color mixing

### Color Correction

- Linear CTO Color Correction: 2,700K-6,700K

### Color Wheel

- 2 Color Wheels:
  - Color Wheel 1: 5 colors, plus open
  - Color Wheel 2: 3 colors + CRI, plus open

### Rotating Gobo Wheel

- 2 Rotating Gobo Wheels:
  - Rotating Gobo Wheel 1: 5 gobos + 1 beam reducer, plus open
    - Gobo Diameter 1: 34 mm,
    - Image Diameter 1: 26.5 mm
  - Rotating Gobo Wheel 2: 6 gobos, plus open
    - Gobo Diameter 2: 34 mm,
    - Image Diameter 2: 26.5 mm
- Coating: Black coating
- Material: Borofloat

### Gobo Animation

- A graphic animation wheel with continuous rotation in both directions, offering excellent vertical and horizontal movement. It can be used alone or in combination with gobos to create water and flame effects

### Framing

- Shutter Blades: 4 blades, each with separate movement and full blackout
- Rotation:  $\pm 60^\circ$  of the complete framing system

### Iris

- Motorized linear Iris

### Frost

- 1° diffusion and 5° diffusion

### Prism

- 2 Combinable Rotating and Indexable Prisms:
  - 1 x 4-facet circular prism, 1 x 4-facet linear prism, rotatable in both directions

### Electrical

- Input Voltage Range: 180-240Vac; 50/60Hz
- Power Consumption: 2,200W
- Power In/Out: Waterproof power connector in/out
- Data In/Out: 3-pin or 5-pin waterproof XLR, RJ45 connector

### Physical

- Weight: 63.8 kg (140.7 lbs)
- Length (Head): 701 mm (27.6")
- Length (Base): 465 mm (18.3")
- Width (Across Yoke): 544 mm (21.4")
- Height (Head Up): 893 mm (18.3")

### Construction

- Housing: Aluminum-magnesium alloy and nylon
- Color: Black
- Protection Rating: IP66

### Work Environment

- Maximum Ambient Temperature: 45°C
- Minimum Operating Temperature: -20°C
- Maximum Surface Temperature: 80°C

### Acoustic Data

- Noise Level:
  - Auto Mode: 52 dB(A) @ 1 m
  - Quiet Mode: 46 dB(A) @ 1 m
  - Super Quiet Mode: 43 dB(A) @ 1 m

# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power

**SPEC SHEET**

## TECHNICAL SPECIFICATIONS

### Installation

- Vertical mounting
- 2 omega brackets
- Safety cable attachment point

### Approvals

- CE compliant  
EMC directive 2014/30/EU  
LVD directive 2014/35/EU
- cETLus compliant  
UL 1573  
CSA C22.2 #166
- UKCA compliant  
Electromagnetic Compatibility Regulations 2016  
Electrical Equipment (Safety) Regulations 2016



## INCLUDED ITEMS

### Included Items

- QR code on fixture to receive digital user manual
- Power cable
- 2 omega brackets (3002003003)

# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power

**SPEC SHEET**

## ORDERING INFORMATION

### Optional Accessories

(With Order Code)

- Flight Case:
  - Standard: One-pack loader case (63584312)
  - North American Standard: One-pack loader case (63584376)
- SUPERNOVA LT Camera Enclosure: 63584479
- SUPERNOVA LT Follow Spot Kit: 63584190
- SUPERNOVA LT Follow Spot Handle Only: 63584218
- SUPERNOVA LT Follow Spot Control Pad Only: 63584219
- 3° diffusion: 3015001393
- Signal Cable:
  - 3-pin waterproof signal cable (3017013468) or
  - 5-pin waterproof signal cable (3017013473)
- Safety Cable: SW-05 (2060001603-E)
- Clamp: C-250B (2060001632-B)

### Carton Dimensions

- Width: 830 mm (32.6")
- Depth: 575 mm (22.6")
- Height: 805 mm (31.7")
- Weight:
  - G.W.: 70.5 kg(155.4lbs)(one-pack loader carton)



3-pin/5-pin waterproof  
signal cable: 3017013468/3017013473



SW-05: 2060001603-E



C-250B: 2060001632-B



3° diffusion: 3015001393



SUPERNOVA LT Camera  
Enclosure: 63584479



SUPERNOVA LT Follow  
Spot Kit: 63584190



SUPERNOVA LT Follow Spot  
Handle Only: 63584218



SUPERNOVA LT Follow Spot  
Control Pad Only: 63584219



Standard (One-pack loader  
case): 63584312

Foshan YiFeng Electric Industrial Co., Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 09/07/2026

**Acme®**

# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power

**SPEC SHEET**

## (STANDARD) FLIGHT CASE

### APPLICABLE MODELS

- SUPERNOVA LT (XA 2000 BSWF IP LT)

### ORDER CODE

- 63584312 SUPERNOVA LT (XA 2000 BSWF IP LT)

### CASE WEIGHT

- 77 kg (169.8 lbs)

### MEAS


- 812 x 762 x 950 mm (32.0" x 30.0" x 37.4")

### LOADING Q'TY

- One-pack loader case

### MAXIMUM STACKING

- 2 stacks

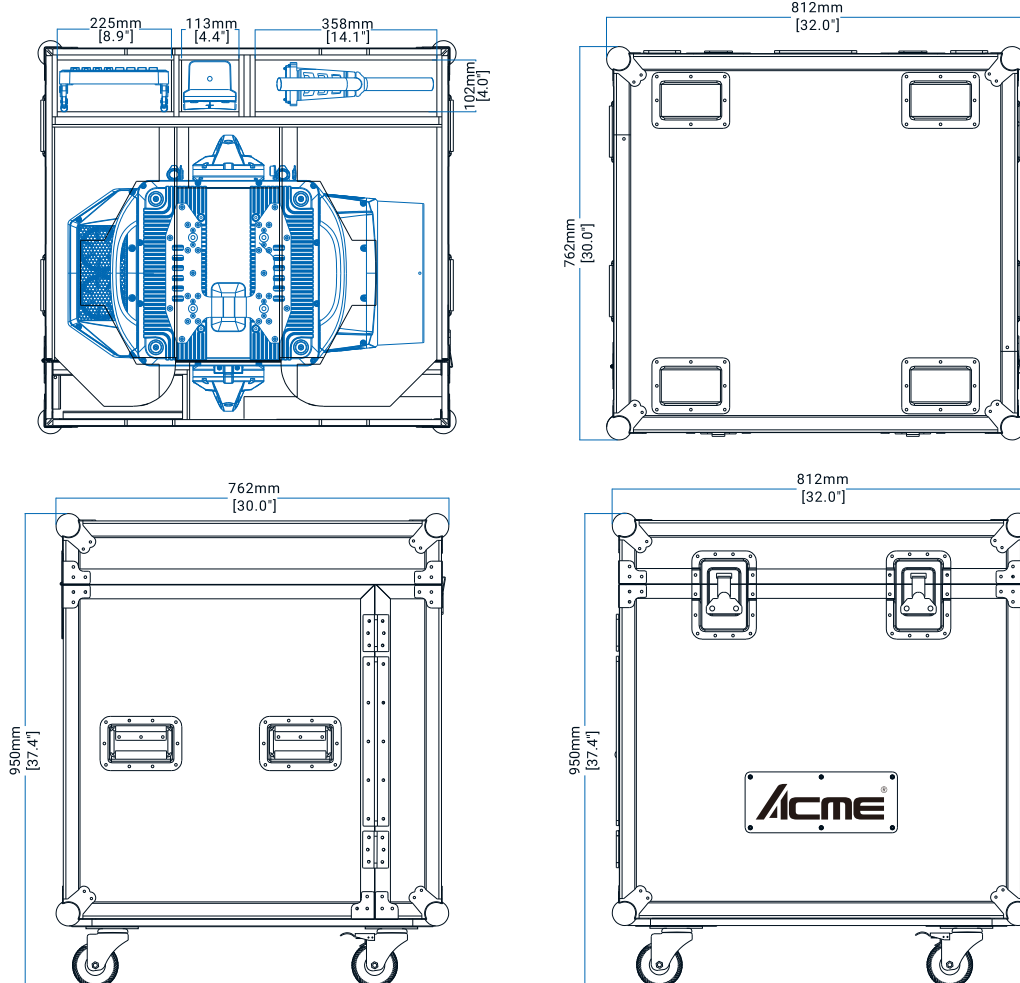

ACASE by ACME Version: 20251222-A

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 09/07/2026

**Acme®**




# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power

SPEC SHEET

## DIMENSIONS

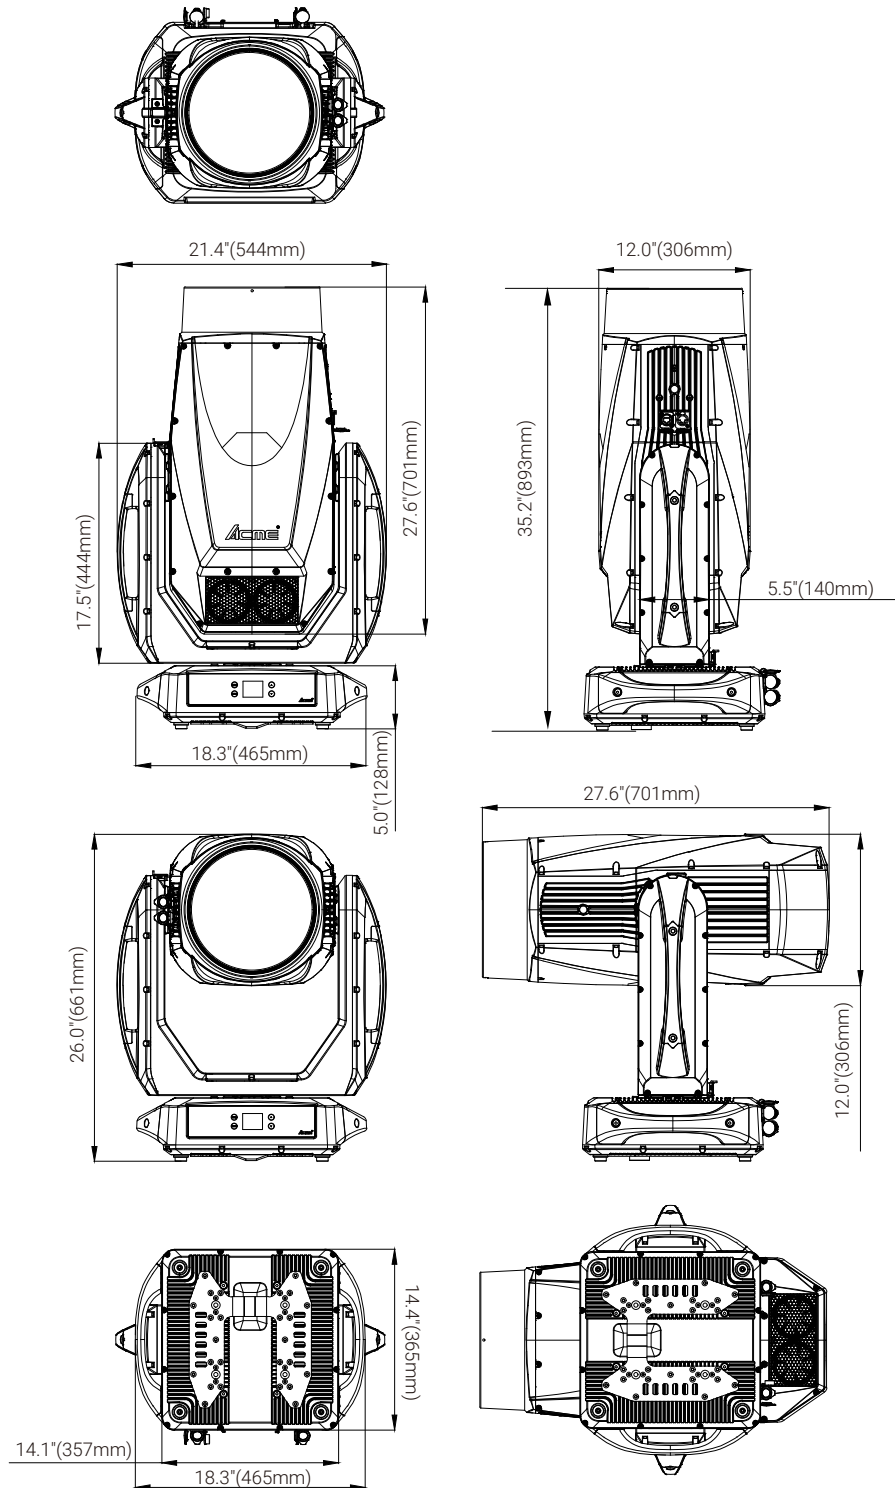

Foshan YiFeng Electric Industrial Co., Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 09/07/2026






# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power


**SPEC SHEET**

## DIMENSIONS


SUPERNOVA LT Follow Spot Control Pad Only  
Weight: 1.1 kg (2.4 lbs)

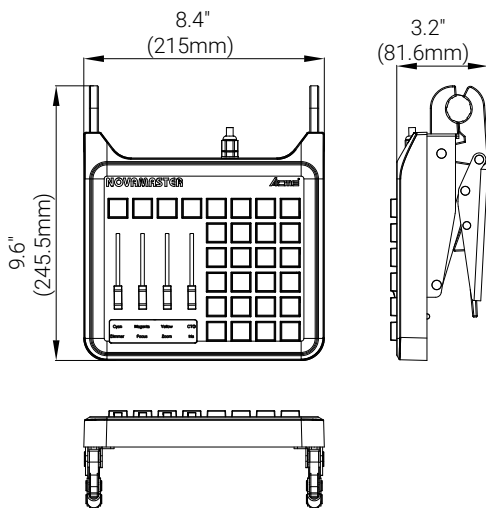


SUPERNOVA LT Camera Enclosure  
Weight: 0.7 kg (1.5 lbs)

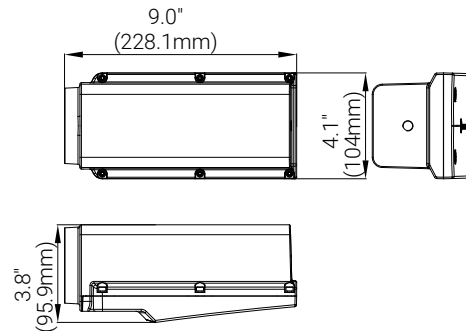

SUPERNOVA LT Follow Spot Kit  
Weight: 2.2kg (4.8 lbs)

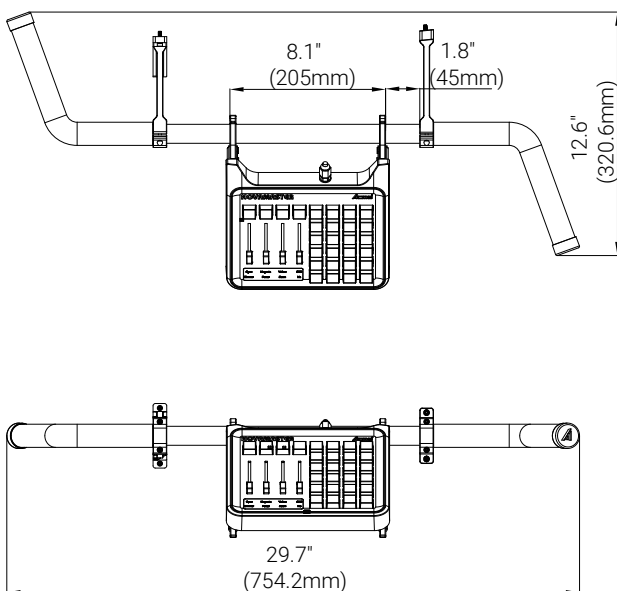


SUPERNOVA LT Follow Spot Handle Only  
Weight: 1.1 kg (2.4 lbs)

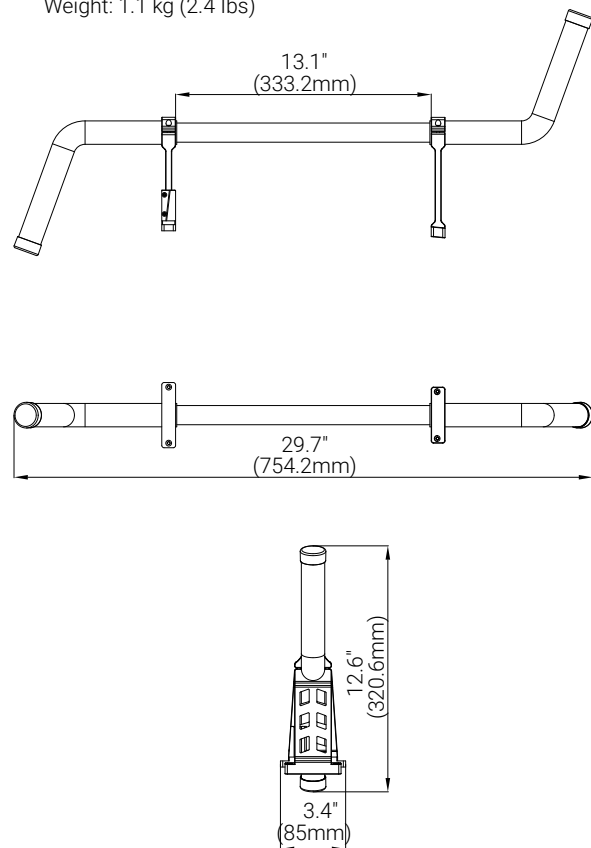

# SUPERNOVA LT


Outdoor Moving Profile – Ultimate Long-Throw Power **SPEC SHEET**

## HANGING DIMENSIONS

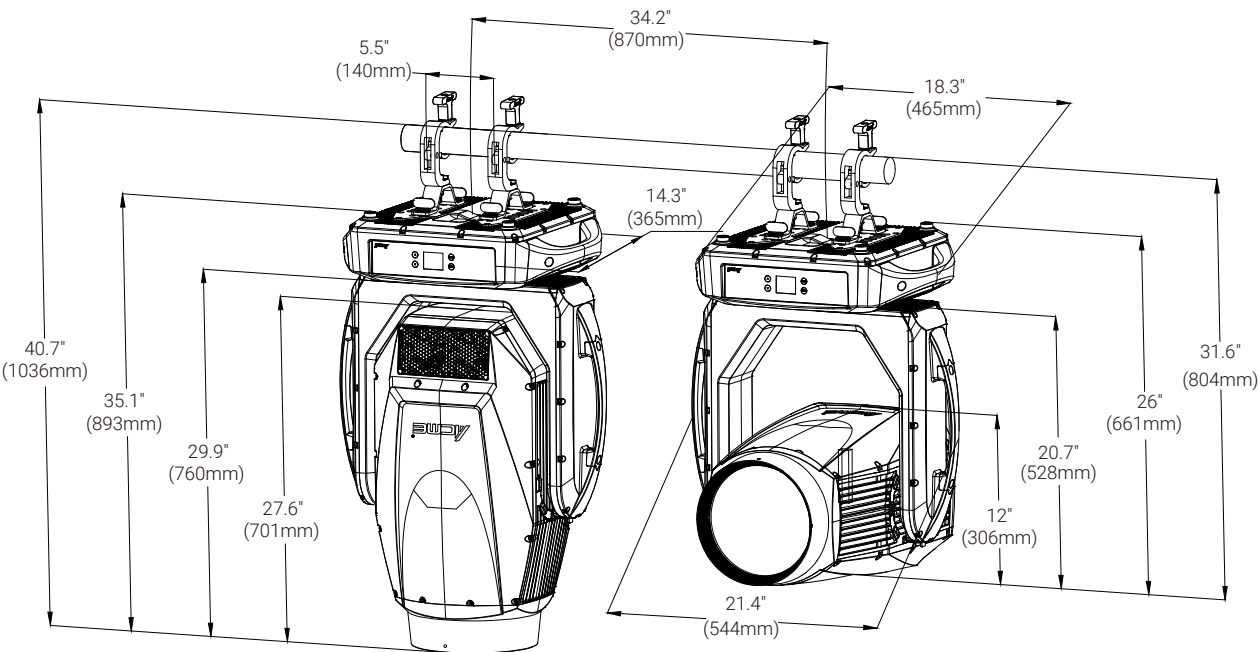

## PHOTOMETRIC

### Auto Mode

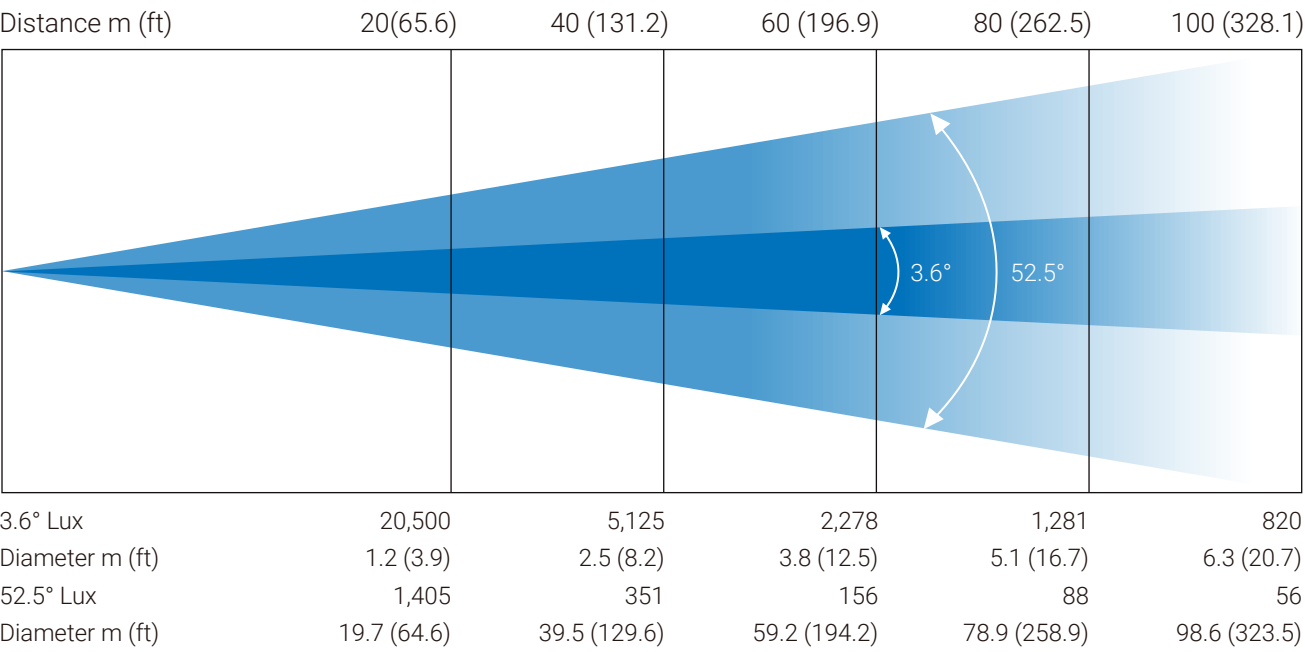


# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power


**SPEC SHEET**

## PHOTOMETRIC

### Quiet Mode

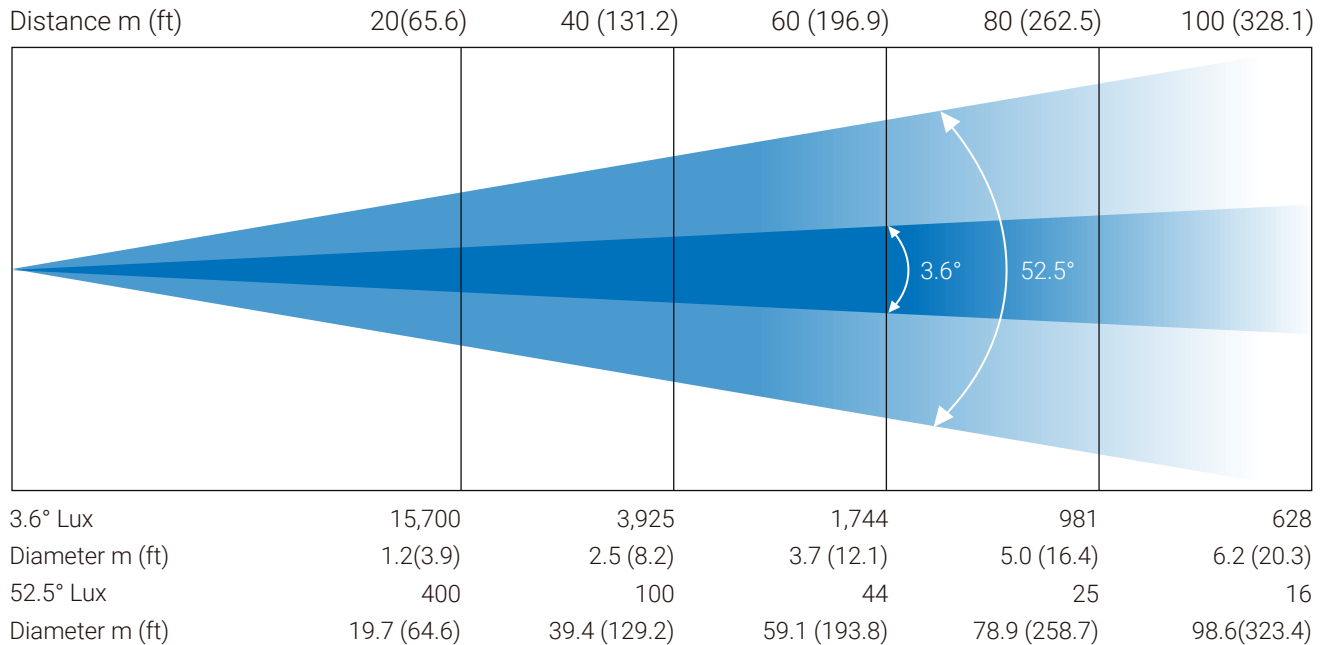

### Super Quiet Mode

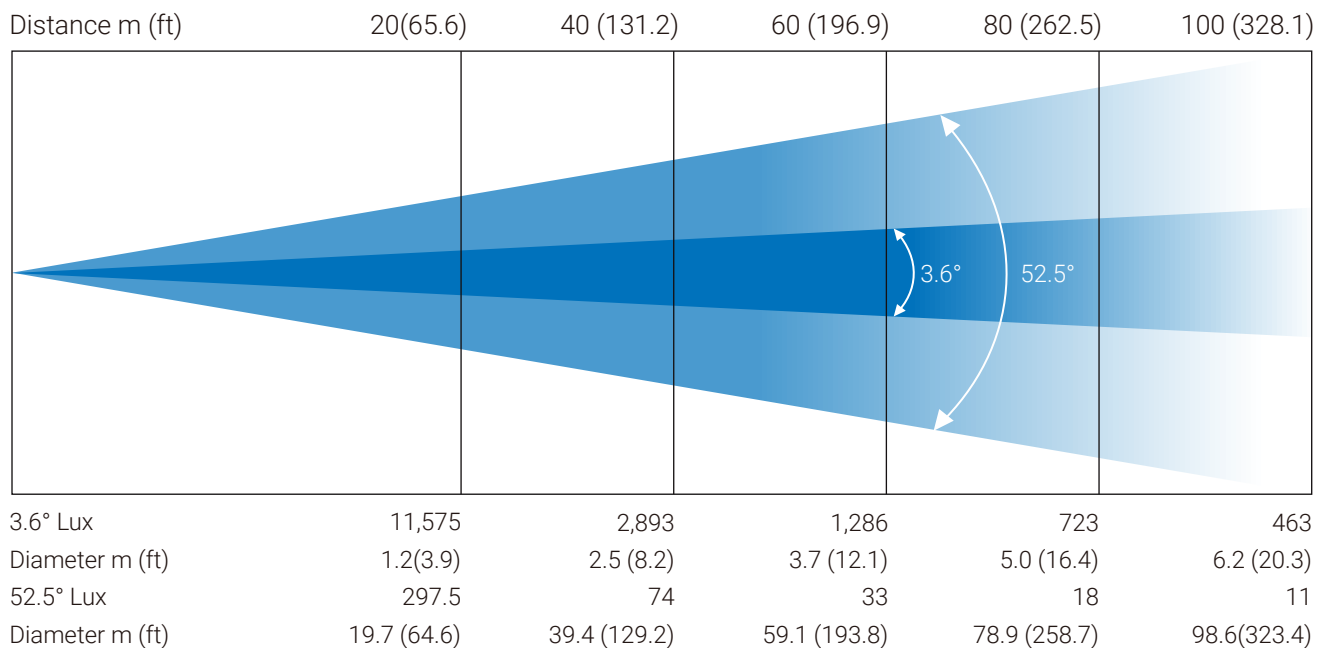

# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power


**SPEC SHEET**

## DYNAMIC EFFECTS


### Color Wheel 1




Red  
Slot 1




Green  
Slot 2



Pink  
Slot 3




Orange  
Slot 4



Blue  
Slot 5


› Dimension:



### Color Wheel 2



CTB  
Slot 1



Yellow  
Slot 2




UV  
Slot 3




CRI  
Slot 4


› Slot 1 Dimension:



› Slot 2-4 Dimension:



### Rotating Gobo Wheel 1




Slot 1




Slot 2



Slot 3



Slot 4




Slot 5



Beam Reducer

› Dimension:



› Material: Borofloat Glass


### Rotating Gobo Wheel 2



Slot 1



Slot 2




Slot 3




Slot 4

› Slot 1-5 Dimension:




› Material: Borofloat Glass


› Slot 6 Dimension:



› Material: Borosilicate Glass



Slot 5



Slot 6

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 09/07/2026

**Acme®**

# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power

**SPEC SHEET**

## DYNAMIC EFFECTS

### Linear CMY Color Mixing



### Linear CTO Color Correction




2,700K-6,700K

### Prisms/Frost Filter



1 x 4-Facet Circular Prism



1 x 4-Facet Linear Prism




1° diffusion



5° diffusion

### Animation Wheel



### Framing/Iris



Framing Module



Linear Iris


# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power


SPEC SHEET

## PHOTOMETRIC REPORT — CHROMATICITY


### Spectral Distribution

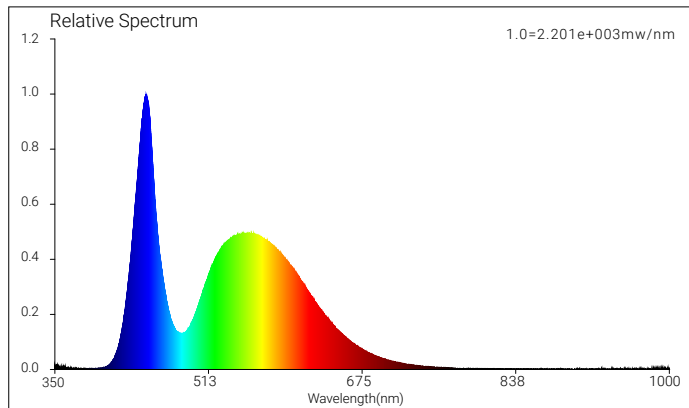

CRI: 72.5(R1-R8)

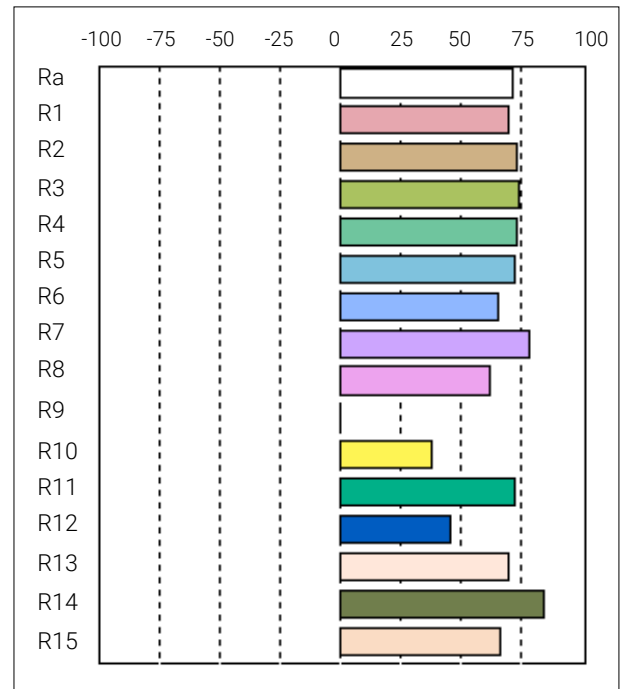

### CIE 1931 EVERFINE

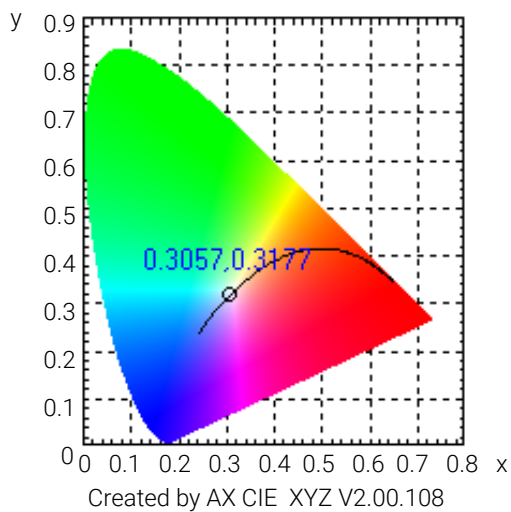

#### CRI C Values

| C1   | C2   | C3   | C4   | C5   | C6   | C7   | C8   | C9  | C10  | C11  | C12  | C13  | C14  | C15  | C16  |
|------|------|------|------|------|------|------|------|-----|------|------|------|------|------|------|------|
| 71.5 | 75.0 | 75.5 | 74.8 | 73.4 | 67.0 | 80.1 | 63.0 | 0.0 | 38.9 | 73.5 | 46.7 | 71.1 | 86.1 | 67.3 | 72.5 |


#### TM30 R Values

| R1   | R2   | R3   | R4   | R5   | R6   | R7   | R8   | R9  | R10  | R11  | R12  | R13  | R14  | R15  |
|------|------|------|------|------|------|------|------|-----|------|------|------|------|------|------|
| 70.1 | 73.2 | 74.3 | 73.4 | 72.2 | 65.5 | 78.3 | 61.2 | 0.0 | 33.6 | 72.9 | 43.7 | 69.4 | 85.5 | 65.1 |

#### CQS Q Values

| Q1   | Q2   | Q3   | Q4   | Q5   | Q6   | Q7   | Q8   | Q9   | Q10  | Q11  | Q12  | Q13  | Q14  | Q15  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 56.9 | 68.8 | 63.9 | 71.9 | 87.6 | 86.9 | 77.4 | 73.1 | 68.7 | 56.8 | 56.2 | 79.3 | 85.6 | 80.8 | 70.3 |

CQS: 73.6(Q1-Q8)

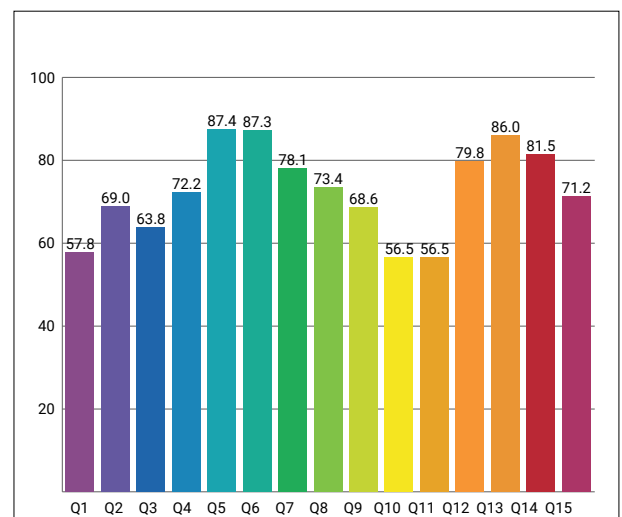

| Color temperature | Color rendering index | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT               | CRI                   | TM30 Rf        | TM30 Rg     | CQS                 | x                         | y                         | u                | v                | $\Delta uv$                     |
| 6814 K            | 72.5                  | 73             | 93          | 73.6                | 0.3084                    | 0.3220                    | 0.1974           | 0.4639           | 0.0018                          |

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 09/07/2026



# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power







SPEC SHEET

## PHOTOMETRIC REPORT — TM-30

TM-30 Rf (IES TM-30-18 Fidelity Index): 73

TM-30 Rg (IES TM-30-18 Fidelity Index): 93

| Hue Bin | Hue Angle       | Graphic shift(%) |        |     |
|---------|-----------------|------------------|--------|-----|
|         |                 | Rf               | Chroma | Hue |
| 1       | 0.0° – 22.5°    | 68               | -18    | -5  |
| 2       | 22.5° – 45.0°   | 67               | -15    | 9   |
| 3       | 45.0° – 67.5°   | 61               | -7     | 23  |
| 4       | 67.5° – 90.0°   | 64               | 3      | 20  |
| 5       | 90.0° – 112.5°  | 73               | 13     | 13  |
| 6       | 112.5° – 135.0° | 84               | 11     | -2  |
| 7       | 135.0° – 157.5° | 82               | 1      | -12 |
| 8       | 157.5° – 180.0° | 77               | -8     | -12 |
| 9       | 180.0° – 202.5° | 77               | -14    | -5  |
| 10      | 202.5° – 225.0° | 68               | -19    | 12  |
| 11      | 225.0° – 247.5° | 65               | -8     | 25  |
| 12      | 247.5° – 270.0° | 60               | 4      | 21  |
| 13      | 270.0° – 292.5° | 82               | 9      | 7   |
| 14      | 292.5° – 315.0° | 81               | 12     | -6  |
| 15      | 315.0° – 337.5° | 76               | 4      | -17 |
| 16      | 337.5° – 360.0° | 71               | -7     | -16 |

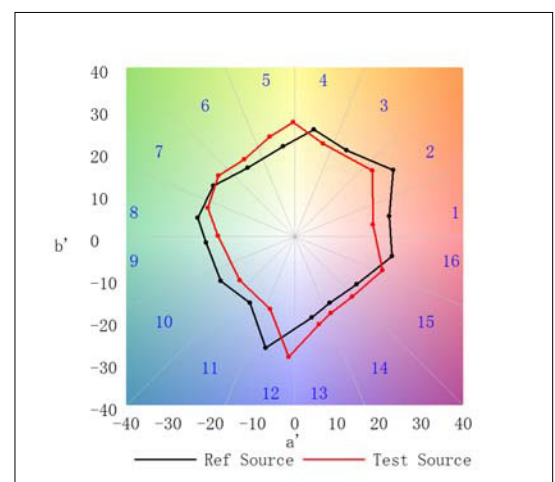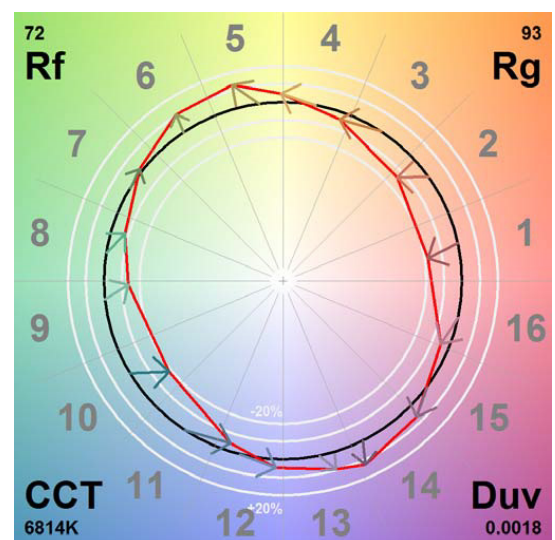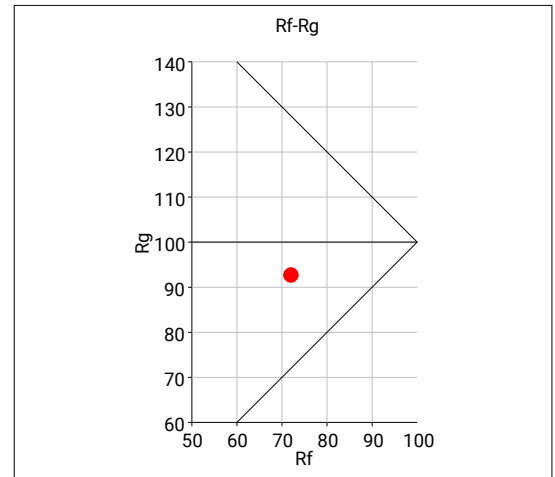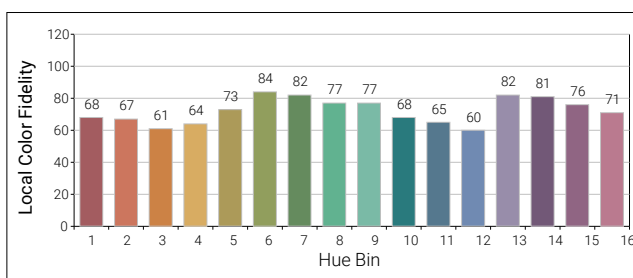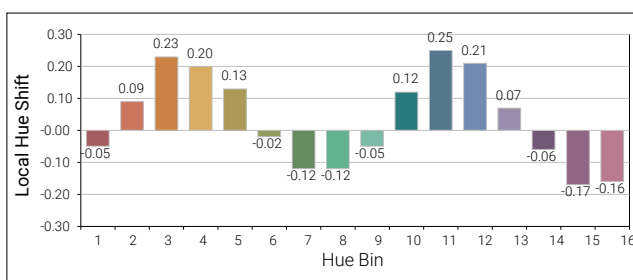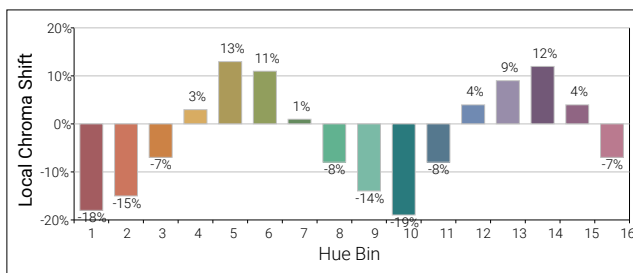

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 09/07/2026

Acme®




# SUPERNOVA LT

Outdoor Moving Profile — Ultimate Long-Throw Power

**SPEC SHEET**

## PHOTOMETRIC REPORT — TM-30

### Color Evaluation Sample

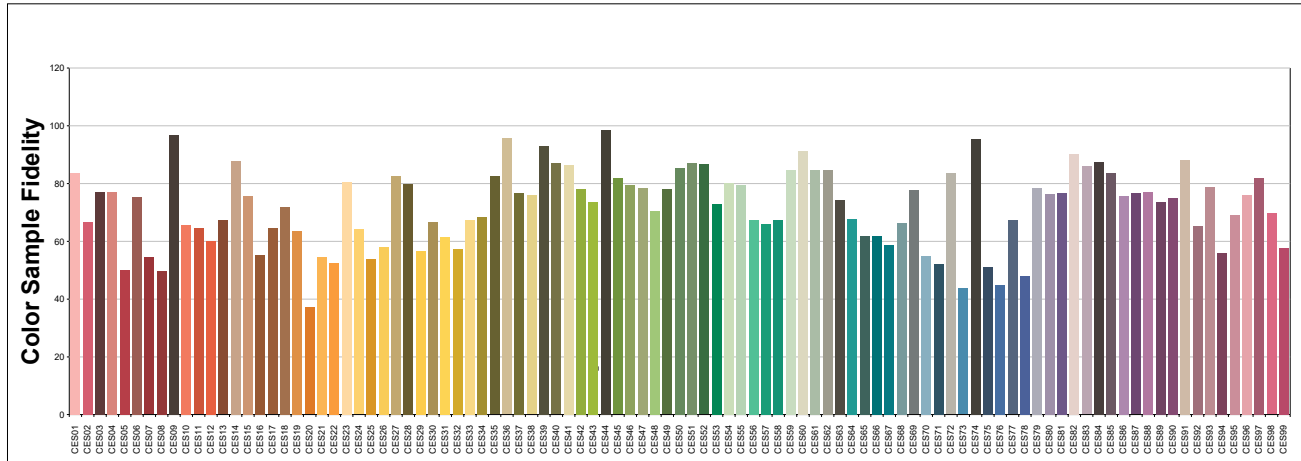

## PHOTOMETRIC REPORT — TLCI-47

### Color Evaluation Sample



| Sector | Lightness | Chroma | Hue |
|--------|-----------|--------|-----|
| R      | 5         | 4      | 2   |
| R/Y    | 1         | 1      | -5  |
| Y      | -2        | -2     | -6  |
| Y/G    | -2        | -3     | 0   |
| G      | -2        | -2     | 3   |
| G/C    | 1         | 0      | 5   |
| C      | 2         | 1      | 1   |
| C/B    | 4         | 1      | -3  |
| B      | 1         | -3     | -3  |
| B/M    | 2         | -4     | 6   |
| M      | 5         | -1     | 8   |
| M/R    | 5         | 1      | 5   |